


BS15

Professional Bass Amplifier

OWNER'S MANUAL



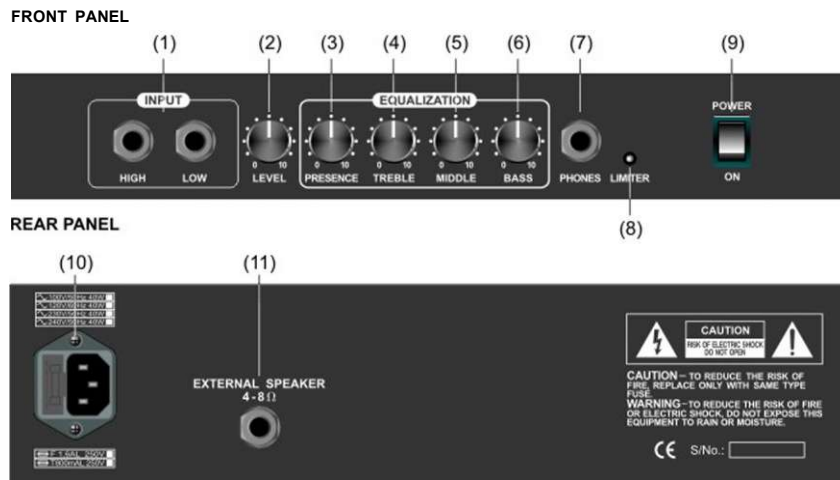

FEATURES:

Front Panel

- (1) **INPUT:**
Input jacks with different sensitivity to connect the bass guitar.
High: 48mV/1 MV. Low: 100mV/50kV.
- (2) **LEVEL:**
Adjust the volume of the signal to the desired level.
- (3) **PRESENCE:**
Influences the sound on a narrow frequency band in the mid/high range.
- (4) **TREBLE:**
Provides high frequency equalization .
- (5) **MIDDLE:**
Provides active midrange equalization with cut and boost.
- (6) **BASS:**
Provides desired amount of bass response.
- (7) **PHONES:**
Allows signal to flow to both sides of any stereo headphone(Impedance>8 Ω).
- (8) **LIMITER LED:**
Indicates when the limiter is ON.
- (9) **POWER:**
Turns the amplifier On and Off.

Rear Panel

(10) AC SOCKET:

Connects the AC power cable.

(11) EXTERNAL SPEAKER:

This jack connects an external speaker (4-8V).

SPECIFICATIONS:

Output power:	20W
Frequency range:	60-6,000Hz
Speaker:	25cm (10"), 30W, 4V
Inputs:	High:48mV/1 MV Low:100mV/50kV
Power supply:	See product label
Dimensions (W x H x D):	380 x 400 x 267mm
Weight:	9Kg

According to the manufacturer.

Subject to technical changes.

.....

The lightning flash with arrowhead symbol, within an equilateral triangle, is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk to persons.



The exclamation point, within an equilateral triangle, is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature.



IMPORTANT SAFETY INSTRUCTIONS

1. Read these instructions.
2. Keep these instructions.
3. Read all warnings.
4. Follow all instructions.
5. Do not use this apparatus near water.
6. Clean only with a damp cloth.
7. Do not block any of the ventilation openings. Install in accordance with the manufacturer's instructions.
8. Do not defeat the safety purpose of the polarized-type plug. A grounding type plug has two blades and a third grounding prong. The third prong is provided for your safety. When the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
9. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
10. Protect the power cord from being walked on or pinched particularly at the plug, convenience receptacles, and the point where they exit from the apparatus.
11. Only use attachments/accessories specified by the manufacturer.
12. Use only with a cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.
13. Unplug this apparatus during lightning storms or when unused for long periods of time.
14. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug, when liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.



WARNING: To reduce the risk of fire or electric shock, do not expose this apparatus to rain or moisture. The apparatus shall not be exposed to dripping or splashing or objects filled with liquids, such as vases. The unit shall not be installed in a cabinet or where the power switch is difficult to access.