




IR --infra-red remote for LED lights

The IR remote together with our LED lights can make colorful and dynamic light scenery effects. It is widely applied to entertainment hall, stage, social club and outdoor building decoration.

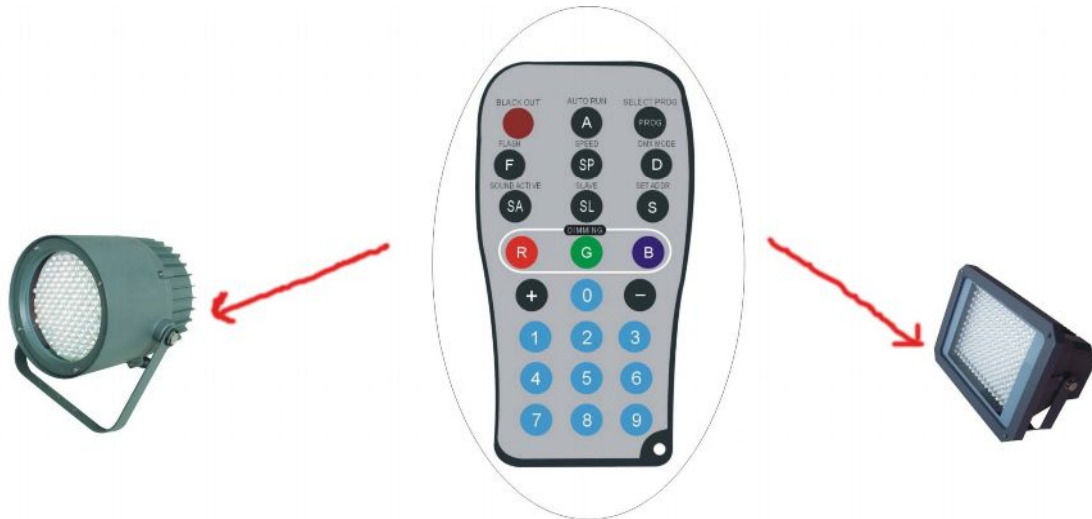

A, Specification:

Power supply: DC 3V

Power consumption: 60MW

Dimensions (LxWxH): 110 x 46 x 7 mm

Weight: 22 g

Transmitting IR signal available. **The distance available is at most 10M.**

Selectable IR signal including RGB dimming, built-in programs, auto running, flash, speed, slave mode, DMX mode and DMX address for different applications by pushing the buttons which can control the LED lights.

B, Operation:

- 1, “BLACK OUT” button, set the LED lights power on or power off by pressing this button.
- 2, “A” button, set the LED lights in the situation of auto run by pressing this button.
- 3, “PROG” button, set the LED lights to run built-in programs by pressing this button; select the programs—7 color selection, color jumping and color dream by pressing “+” and “-” buttons.
- 4, “F” button, set the LED lights flash on or flash off by pressing this button; increase or decrease the speed of flash by pressing “+” and “-” buttons.

5, “SP” button, set the LED lights running speed by pressing this button. This button is available only in the situation of color jumping and color dream; increase and decrease the speed by pressing “+” and “-” buttons.

6, “D” button, set the LED lights into DMX mode by pressing this button.

7, “SA” button, set the LED lights into sound activated mode by pressing this button. **(unavailable for outdoor LED lights).**

8, “SL” button, set slave mode by pressing this button.

9, “S” “0” “1” “2” “3” “4” “5” “6” “7” “8” “9” buttons, set DMX address for the LED lights by pressing these buttons.

For example,

set DMX address “245”

- ① Press “S” button, then the red LEDs are on, it mean you can start to set address.
- ② Press “2” button, then the green LEDs are on, it means“2”(hundreds place) setting successful.
- ③ Press “4” button, then the blue LEDs are on, it means“4”(tens place) setting successful
- ④ Press “5” button, then all the R/G/B LEDs are on, it means“5”(ones place) setting and the DMX address setting successful

set DMX address “002”

- ① Press “S” button, then the red LEDs are on, it mean you can start to set address.
- ② Press “0” button, then the green LEDs are on, it means“0”(hundreds place) setting successful..
- ③ Press “0” button, then the blue LEDs are on, it means“0”(tens place) setting successful..
- ④ Press “2” button, then all the R/G/B LEDs are on, it means“2”(ones place) setting and DMX address setting successful..

10, “R” “G” “B” “+” and “-” buttons, set the brightness for the RGB LEDs by pressing these buttons.

Notice: The IR remote is not available when the LED lights controlled by DMX controller.

